



BEZEL Square

Product & Installation Details

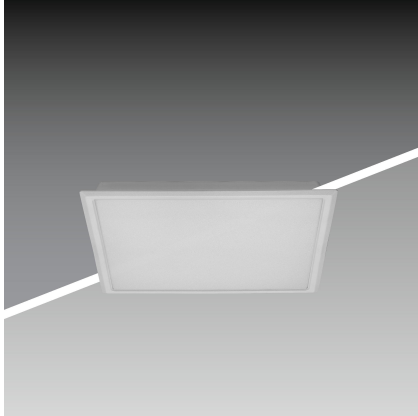

Product Details

System Wattage

15W

Lumen Output

1500lm

Efficacy

100lm/W

CCT [K]

3000 | 4000 | 6500

Beam Angle

120°

Driver

350mA

General Specification

Product Preference

Environment

Indoor

Installation

Ceiling Recessed

Construction & Materials

Housing

High Quality PC

Body Finish

White

Thermal Management

Heat Sink Material

-

Cooling Technique

Passive Cooling

LED Technology

LED Life Time @L70/B10

>50000 Hrs.

Colour Rendering (CRI)

CRI80 as Standard

General Features

Operating Temperature

0°C-50°C

Ingress Protection (IP)

IP33

Diffuser

Opal Diffuse

Electrical System

Driven With

Constant Current Driver

Input Voltage

220V-240V/50-60Hz

Driver

Non-Integrated

Controls

Standard

On / Off

Optional

Mains / Analog / Dali

Bluetooth

Optical System

Beam Direction

Fixed

Tilt


No

Swivel

No

Product Details:

Product Name	CCT	Beam Angle	Finish	Dimming Option
BEZEL SQ - 15W	CW	120°	White	BLE/DALI/ANALOG
	NW	120°	White	BLE/DALI/ANALOG
	WW	120°	White	BLE/DALI/ANALOG



*Parameters may differ due to CCT or Driver current variation.

