


BRILLO 2X2

Product & Installation Details

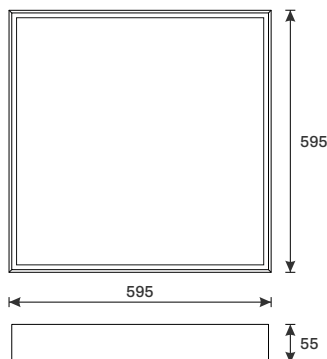

 Cut-Out: 575 x 575
*All Dimensions are in mm.

Product Details

System Wattage
36W

Lumen Output
3600lm

Efficacy
100lm/W

CCT [K]
3000 | 4000 | 6500

Type of optics
Opal Diffused

Driver
1050mA

General Specification

Product Preference

Environment
Indoor

Installation
Ceiling Recessed
Grid Ceiling 600mm

Construction & Materials

Housing / Diffuser
Aluminium / PMMA Diffuser

Body Finish
Black / White / Custom

Thermal Management

Heat Sink Material
Aluminium

Cooling Technique
Passive Cooling

LED Technology

LED Life Time @L70/B10
>50000 Hrs.

Colour Rendering (CRI)
CRI80 as Standard

General Features

Operating Temperature
0°C-50°C

Ingress Protection (IP)
IP20

UGR
>19

Electrical System

Driven With
Constant Current Driver

Input Voltage
220V-240V/50-60Hz

Driver
Non-Integrated

Controls

Standard
On / Off

Optional
Mains / Analog / Dali
Bluetooth

Optical System

Beam Direction
Fixed

Tilt
No

Swivel
No

Product Details:

Product Name	CCT	Optic	Finish	Dimming Option
BRILLO 2X2 - 36W	CW	Opal Diffused	Black / White	BLE/DALI/ANALOG
	NW	Opal Diffused	Black / White	BLE/DALI/ANALOG
	WW	Opal Diffused	Black / White	BLE/DALI/ANALOG

