


ERICA R

Product & Installation Details

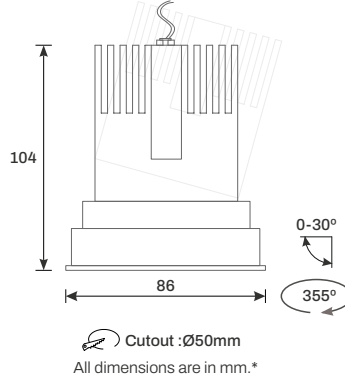

Product Details

System Wattage
12W

Lumen Output
1020lm

Efficacy
90lm/W

CCT [K]
3000 | 4000 | 6500

Beam Angle
15°/ 24°/ 36°

Driver
300mA

General Specification

Product Preference

Environment
Indoor

Installation
Ceiling Recessed

Construction & Materials

Housing
Die Cast Aluminium

Finish
Powder Coating - White
Reflector - Black Chrome
Matte Black / White / Gold

Thermal Management

Heat Sink Material
Die Cast Aluminium

Cooling Technique
Passive Cooling

LED Technology

LED Life Time @L70/B10
>50000 Hrs.

Colour Rendering (CRI)
CRI90 as Standard

General Features

Operating Temperature
0°C-50°C

Ingress Protection (IP)
IP20

Electrical System

Driven With
Constant Current Driver

Input Voltage
220V-240V/50-60Hz

Driver
Non-Integrated

Controls

Standard
On / Off

Optional
Mains / Analog / Dali
Bluetooth

Optical System

Beam Direction
Adjustable


Tilt
Yes

Swivel
Yes

Product Details:

Product Name	CCT	Beam Angle	Finish	Dimming Option
ERICA R - 12W	CW	15°/ 24°/ 36°	White / Black	BLE/DALI/ANALOG
	NW	15°/ 24°/ 36°	White / Black	BLE/DALI/ANALOG
	WW	15°/ 24°/ 36°	White / Black	BLE/DALI/ANALOG

Refelectors

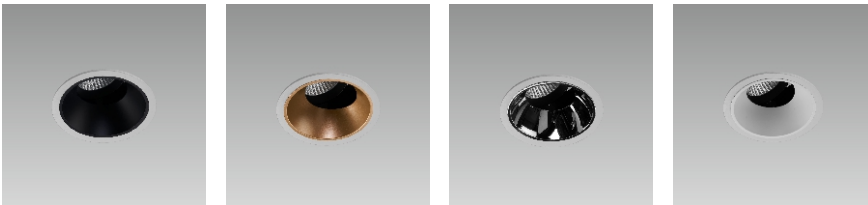

*Abbreviation: R= Reflector | Parameters may differ due to CCT or Driver current variation.

