


# ERICA R

## Product & Installation Details

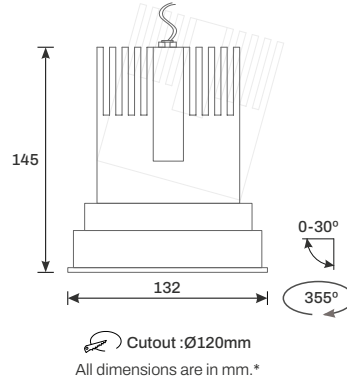

## Product Details

**System Wattage**  
25W

**Lumen Output**  
2100lm

**Efficacy**  
90lm/W

**CCT [K]**  
3000 | 4000 | 6500

**Beam Angle**  
15°/ 24°/ 36°

**Driver**  
600mA

## General Specification

### Product Preference

**Environment**  
Indoor

**Installation**  
Ceiling Recessed

### Construction & Materials

**Housing**  
Die Cast Aluminium

**Finish**  
Powder Coating - White  
Reflector - Black Chrome  
Matte Black / White / Gold

### Thermal Management

**Heat Sink Material**  
Die Cast Aluminium

**Cooling Technique**  
Passive Cooling

### LED Technology

**LED Life Time @L70/B10**  
>50000 Hrs.

**Colour Rendering (CRI)**  
CRI90 as Standard

### General Features

**Operating Temperature**  
0°C-50°C

**Ingress Protection (IP)**  
IP20

### Electrical System

**Driven With**  
Constant Current Driver

**Input Voltage**  
220V-240V/50-60Hz

**Driver**  
Non-Integrated

### Controls

**Standard**  
On / Off

**Optional**  
Mains / Analog / Dali  
Bluetooth

### Optical System

**Beam Direction**  
Adjustable


**Tilt**  
Yes

**Swivel**  
Yes

## Product Details:

| Product Name  | CCT | Beam Angle    | Finish        | Dimming Option  |
|---------------|-----|---------------|---------------|-----------------|
| ERICA R - 25W | CW  | 15°/ 24°/ 36° | White / Black | BLE/DALI/ANALOG |
|               | NW  | 15°/ 24°/ 36° | White / Black | BLE/DALI/ANALOG |
|               | WW  | 15°/ 24°/ 36° | White / Black | BLE/DALI/ANALOG |

## Refelectors

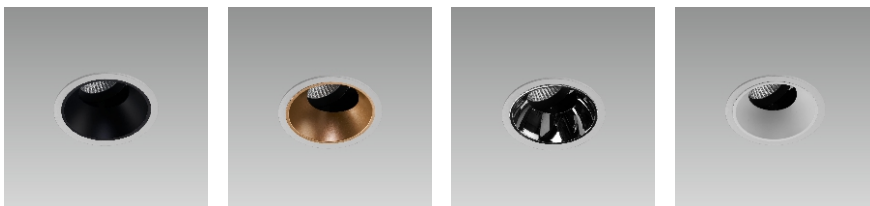

\*Abbreviation: R= Reflector | Parameters may differ due to CCT or Driver current variation.