
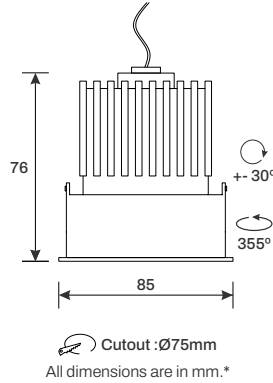


FLARE Round Deep Recessed

Product & Installation Details

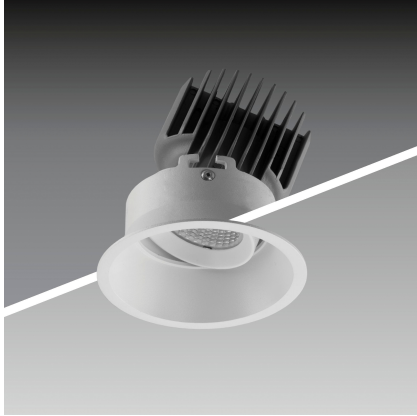

Product Details

System Wattage

5W

Lumen Output

450lm

Efficacy

90lm/W

CCT [K]

3000 | 4000 | 6500

Beam Angle

24° / 36° / 45°

Driver

150mA

General Specification

Product Preference

Environment

Indoor

Installation

Ceiling Recessed

Construction & Materials

Housing

Die Cast Aluminium

Body Finish

Powder Coating

Black / White / Custom

Thermal Management

Heat Sink Material

Die Cast Aluminium

Cooling Technique

Passive Cooling

LED Technology

LED Life Time @L70/B10

>50000 Hrs.

Colour Rendering (CRI)

CRI80 as Standard

General Features

Operating Temperature

0°C-50°C

Ingress Protection (IP)

IP20

Electrical System

Driven With

Constant Current Driver

Input Voltage

220V-240V/50-60Hz

Driver

Non-Integrated

Controls

Standard

On / Off

Optional

Mains / Analog / Dali

Bluetooth

Optical System

Beam Direction

Adjustable

Tilt

Yes

Swivel

Yes

Product Details:

Product Name	CCT	Beam Angle	Finish	Dimming Option
FLARE RD DR - 5W	CW	24° / 36° / 45°	Black / White	BLE/DALI/ANALOG
	NW	24° / 36° / 45°	Black / White	BLE/DALI/ANALOG
	WW	24° / 36° / 45°	Black / White	BLE/DALI/ANALOG



*Parameters may differ due to CCT or Driver current variation.

