


FLORID

Product & Installation Details

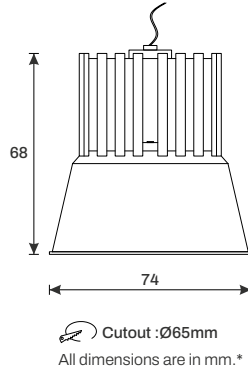

Product Details

System Wattage
7W

Lumen Output
700lm

Efficacy
100lm/W

CCT [K]
3000 | 4000 | 6500

Beam Angle
15° / 25° / 38° / 60°

Driver
250mA

General Specification

Product Preference

Environment
Indoor

Installation
Ceiling Recessed

Construction & Materials

Housing
Die Cast Aluminium

Body Finish
Powder Coating - Black / White

Reflector Color
Glossy - Rose Gold

Thermal Management

Heat Sink Material
Die Cast Aluminium

Cooling Technique
Passive Cooling

LED Technology

LED Life Time @L70/B10
>50000 Hrs.

Colour Rendering (CRI)
CRI80 as Standard

General Features

Operating Temperature
0°C-50°C

Ingress Protection (IP)
IP20

Electrical System

Driven With
Constant Current Driver

Input Voltage
220V-240V/50-60Hz

Driver
Non-Integrated

Controls

Standard
On / Off

Optional
Mains / Analog / Dali
Bluetooth

Optical System

Beam Direction
Non-Adjustable

Tilt
No

Swivel
No

Product Details:

Product Name	CCT	Beam Angle	Finish	Dimming Option
FLORID - 7W	CW	15° / 25° / 38° / 60°	White / Black	BLE/DALI/ANALOG
	NW	15° / 25° / 38° / 60°	White / Black	BLE/DALI/ANALOG
	WW	15° / 25° / 38° / 60°	White / Black	BLE/DALI/ANALOG



*Reflector Shades Available: Silver Chrome, Rose Gold, Dark Chrome, Matte Gold.

*Parameters may differ due to CCT or Driver current variation.

