


MGT23-FXD

Magnetic Linear Fixed Diffused Downlight

Product & Installation Details

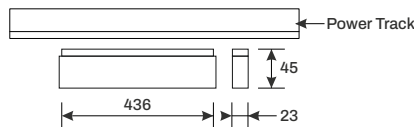

All dimensions are in mm.*

Product Details

System Wattage

24W

Lumen Output

2400lm

Efficacy

100lm/W

CCT [K]

3000 | 4000 | 6000

Beam Angle

24°

Driver

48VDC

General Specification

Product Preference

Environment

Indoor

Installation

Track Mounted

Construction & Materials

Housing

Die Cast Aluminium

Body Finish

Powder Coating - Black / White

Thermal Management

Heat Sink Material

Die Cast Aluminium

Cooling Technique

Passive Cooling

LED Technology

LED Life Time @L70/B10

>50000 Hrs.

Colour Rendering (CRI)

CRI90

General Features

Operating Temperature

0°C-50°C

Ingress Protection (IP)

IP20

Electrical System

Driven With

Constant Voltage Driver

Input Voltage

220V-240V/50-60Hz

Driver

Integrated

Controls

Standard

On / Off

Optional

Mains / Analog / Dali

Bluetooth

Optical System

Beam Direction

Fixed

Tilt


No

Swivel

No

Product Details:

Product Name	CCT	Beam Angle	Finish	Dimming Option
MGT23-FXD - 24W	CW	24°	White / Black	BLE/DALI/ANALOG
	NW	24°	White / Black	BLE/DALI/ANALOG
	WW	24°	White / Black	BLE/DALI/ANALOG



*For different wattage length will vary.

*Parameters may differ due to CCT or Driver current variation.

