


MGT23-FXG

Magnetic Fixed Grill Downlight

Product & Installation Details

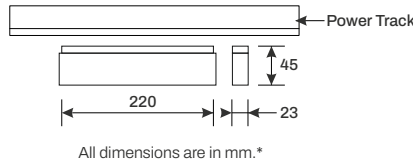

Product Details

System Wattage
12W

Lumen Output
1200lm

Efficacy
100lm/W

CCT [K]
3000 | 4000 | 6000

Beam Angle
24°

Driver
48VDC

General Specification

Product Preference

Environment
Indoor

Installation
Track Mounted

Construction & Materials

Housing
Die Cast Aluminium

Body Finish
Powder Coating - Black / White

Thermal Management

Heat Sink Material
Die Cast Aluminium

Cooling Technique
Passive Cooling

LED Technology

LED Life Time @L70/B10
>50000 Hrs.

Colour Rendering (CRI)
CRI90

General Features

Operating Temperature
0°C-50°C

Ingress Protection (IP)
IP20

Electrical System

Driven With
Constant Voltage Driver

Input Voltage
220V-240V/50-60Hz

Driver
Integrated

Controls

Standard
On / Off

Optional
Mains / Analog / Dali
Bluetooth

Optical System

Beam Direction
Fixed

Tilt
Fixed

Swivel
Fixed

Product Details:

Product Name	CCT	Beam Angle	Finish	Dimming Option
MGT23-FXG - 12W	CW	24°	White / Black	BLE/DALI/ANALOG
	NW	24°	White / Black	BLE/DALI/ANALOG
	WW	24°	White / Black	BLE/DALI/ANALOG



*For different wattage length of modules will vary.

*Parameters may differ due to CCT or Driver current variation.