


PICSEL

Recessed Wallwasher

Product & Installation Details

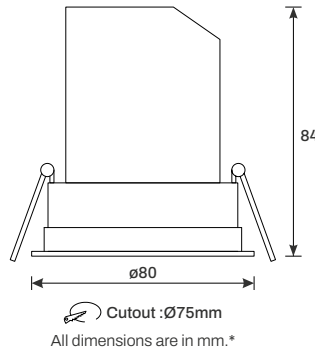

Product Details

System Wattage
12W

Lumen Output
864lm

Efficacy
72lm/W

CCT [K]
3000 | 4000 | 6000

Beam Angle
Assymetrical

Driver
300mA

General Specification

Product Preference

Enviroment
Indoor

Installation
Ceiling Recessed

Construction & Materials

Housing
Die Cast Aluminium

Finish
Powder Coating
Black / White / Custom

Thermal Management

Heat Sink Material
Die Cast Aluminium

Cooling Technique
Passive Cooling

LED Technology

LED Life Time @L80/B10
>50000 Hrs.

Colour Rendering (CRI)
CRI90 as Standard

General Features

Operating Temperature
0°C-50°C

Ingress Protection (IP)
IP40

Electrical System

Driven With
Constant Current Driver

Input Voltage
220V-240V/50-60Hz

Driver
Non-Integrated

Controls

Standard
On / Off

Optional
Mains / Analog / Dali
Bluetooth

Optical System

Beam Direction
Fixed

Tilt
No

Swivel
No


Product Details:

Product Name	CCT	Beam Angle	Finish	Dimming Option
PICSEL - 12W	CW	Assymetrical	White / Black	BLE/DALI/ANALOG
	NW	Assymetrical	White / Black	BLE/DALI/ANALOG
	WW	Assymetrical	White / Black	BLE/DALI/ANALOG

Antiglare Cover:



Chrome Silver



Pearl Black

*Parameters may differ due to CCT or Driver current variation.

Focus Lighting & Fixtures Ltd.

1007-1010 - Corporate Avenue,
Sonawala Cross Lane, Near Udyog Bhawan
Goregaon - (E) - 400063



www.trix.co.in

*Please print this spec sheet only if necessary. Go Green.