


## ZEUS - 2X

### Product & Installation Details

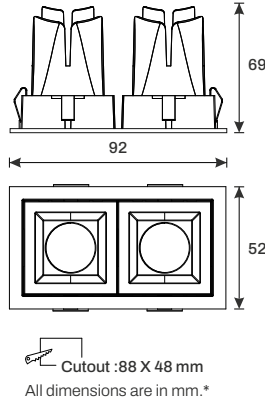

### Product Details

**System Wattage**  
10W

**Lumen Output**  
900lm

**Efficacy**  
90lm/W

**CCT [K]**  
3000 | 4000 | 6500

**Beam Angle**  
30°

**Driver**  
300mA

### General Specification

#### Product Preference

**Environment**  
Indoor

**Installation**  
Ceiling Recessed

#### Construction & Materials

**Housing**  
Die Cast Aluminium

**Body Finish**  
Powder Coating - Black / White

#### Thermal Management

**Heat Sink Material**  
Die Cast Aluminium

**Cooling Technique**  
Passive Cooling

#### LED Technology

**LED Life Time @L70/B10**  
>50000 Hrs.

**Colour Rendering (CRI)**  
CRI80 as Standard

#### General Features

**Operating Temperature**  
0°C-50°C

**Ingress Protection (IP)**  
IP20

#### Electrical System

**Driven With**  
Constant Current Driver

**Input Voltage**  
220V-240V/50-60Hz

**Driver**  
Non-Integrated

#### Controls

**Standard**  
On / Off

**Optional**  
Mains / Analog / Dali  
Bluetooth

#### Optical System


**Beam Direction**  
Non-Adjustable

**Tilt**  
No

**Swivel**  
No

### Product Details:

Product Name	CCT	Beam Angle	Finish	Dimming Option
ZEUS 2X - 10W	CW	30°	White / Black	Not Available
	NW	30°	White / Black	Not Available
	WW	30°	White / Black	Not Available



\*Parameters may differ due to CCT or Driver current variation.