

FOCUS[®]
LIGHTING & FIXTURES LTD

PLUS[®]
LIGHT TECH

TRIX[®]

L&B[®] Lumens
& Beyond

Corporate Office

Focus Lighting & Fixtures Ltd.
1007-1010, Corporate Avenue,
Sonawala Road, Goregaon(E),
Mumbai-400063. India.

T +91-22-2686 5671 -5

E info@trix.co.in

Work

Focus Lighting & Fixtures Ltd.
Survey No.396/24, Plot no.71/72,
New Ahmedabad Industrial estate,
NH 8A, Moraiya,
Dist. Sanand, Gujarat -382210

T +91-22-2686 5671 -5

UAE Office

Block D1-19, Free Zone gate -1,
AL Bustan, Ajman Free Zone.
PO Box- 28555.
Dubai, UAE.

T +971 - 67449598

www.trix.co.in

TRIX[®]

PRODUCT **24**
SHOWCASE
illuminating lives smartly



Trix is a brand owned by **Focus Lighting & Fixtures Ltd.** Mumbai, having presence in India, Middle East & Singapore. Focus Lighting has been leader in Retail Segment thru brand **PLUS** and also a pioneer in smart Lighting under Brand L&B.

Focus Lighting since inception at 2005 is known for various design & Technological breakthroughs in lighting solutions & been a driving force for many innovations.

Trix is an enterprising venture by Focus Lighting, dwelling on vast experience and knowhow in developing, manufacturing & supplying lighting solutions. Our basket has solutions for Residential, Hospitality, Offices, Retail & Commercial solutions, with energy optimisation being central to sustainable future, the trend setting new range of TRIX LED's are a perfect combination of aesthetics & efficiency.

We are continuously innovating Smart Lighting Initiatives or connected lighting with a consistent investment on internet of things(IOT) with a vision of providing **HUMAN CENTRIC LIGHTING** solution to individuals.

TRIX high Quality fixtures are easy to install, use & maintain, meeting stringent standards of quality for ecologically & economically sensible solutions. All Trix product basket is a perfect balance & mix of Design, Innovation, Efficiency along with value proposition that is economical.

Innovating

for Efficiency



Sustainable, Green Technology

LED technology is the light source of the future. A convenient, highly efficiency, energy-saving light source has a long life cycle and an absence of mercury.



High Lumen Efficiency

The radiation pattern of the LED eliminates the need to direct the light around the source. As a result, there is no light loss at the source, thus increasing its efficiency.



Low energy Consumption

When compared to conventional lighting system such as CFLs and Low-Voltage Halogens, LED's show a remarkable advantages in power consumptions.



Long Product life

LEDs have a long product life of up to 50000 hours with less than 3% drop in light output over its service life.



Convenient

Well Designed and easy to install, LED luminaires are compact and shock-proof. A long product life allows for extensive maintenance-free intervals.




Controlability

LED lamps attain full power the moment they are switched on. Moreover, they easily dimmed to a desired level using suitable drivers.



Mercury Free

Mercury, known to be toxic, is harmful to humans as well as the environment. In comparison to other sources of light, LEDs contain absolutely no mercury.



UV and IR Radiation Free






In comparison with conventional lamps, LEDs produce UV/IR-Free light thus eliminating thermal radiation to the illuminated object.



High Colour Rendering Index

The Colour Rendering Index (CRI) measures the ability of light to reproduce the colours in comparison with an ideal light source. LED has a high CRI of about >80 to >90.

Product Category

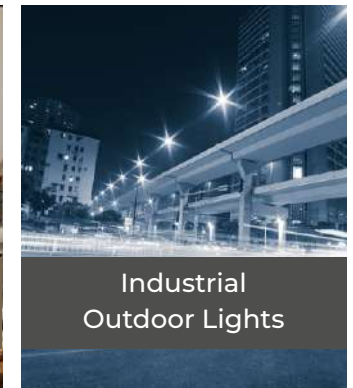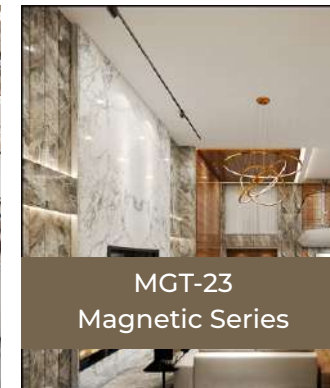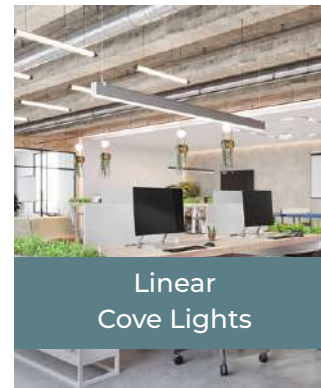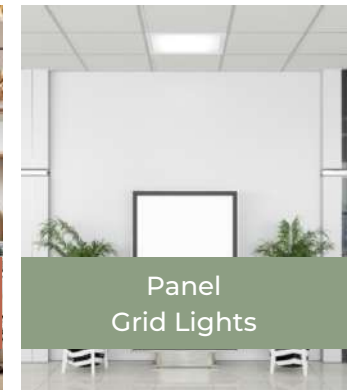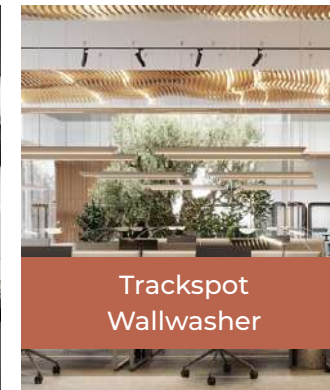

Product flow

Downlights & Spotlights

Dot / Florid	01
Abbys / Merlin	02
Glow Fx / Glow Fx DL	03
Avio DL / Dart	04
Zeus 1x / Zeus 2x	05
Zeus 3x / Zeus 4x	06
Glow Mini / Glow	07
Gleam / Glaze	08
Flare RD / Flare DR	09
Erica L / Erica R	10
Tubus D / Glint	11

Trackspot & Wallwasher

Avio NX / Avio NX Square 1x	15
Avio NX Square 2x / Delta	16
Cane / Octa	17
Comet / Vista	18
Glow / Octa Surface	19

Panel & Grid Lights

Brillo 2x2 / Brillo 4x1	23
Bolt Round / Bolt Square	24
Bezel Round / Bezel Square	25
Plano Round / Plano Square	26
Verve S Round / Verve S Square	27
Viva / Luna	28

Linear & Cove Lights

Lynq / Span	31
Fila Recessed / Fila Surface	32
Fila Pendant / Neon Flex	33
Alloy Recessed / Alloy Surface	34
Alloy Corner / Serie 2835	35

Magnetic Series

MGT23 TS / MGT23 RS	39
MGT23 WWG / MGT23 FXG	40
MGT23 PDT RD / MGT23 Deco	41
MGT23 DWW / MGT23 FXD	42
MGT23 PDT N / MGT23 PDT D	43
MGT23 TRACK / MGT23 Accessories	44

Industrial & Outdoor

Solus	47
Neva	48
Innova / Arena	49



Downlights Spotlights

A downlight is a light fitting (luminaire) that lights in a downward direction to light an area below. They are usually recessed into the ceiling so you see only a small part of fitting below the ceiling. Downlights are generally installed in the surrounding ceilings of bedrooms, living rooms, and bathrooms. Recessed LED lighting fixtures, embedded in the ceiling, are popular in the lighting market.

Spotlights are designed for emphasis, to focus a narrow beam of light at a particular point. Spotlights are fixtures that are used to specify that the illumination on the target surface is higher than that of the surrounding environment. In contrast to LED Downlights, the beam distribution generally does not exceed 45°, 60° degrees. Spotlight use discrete LEDs or Cobs , which are super energy efficient and can run for tens of thousands of hours without failing.

DOT



Recessed Fix Downlight

Aluminium housing with white powder coating. Bright spot deep recessed housing and glare free light effects. Efficient reflector and high output.

Suitable for Spot Light solutions

Beam Angle : 24°, 36° / CRI: 80

Driver : Non-Integrated.



IP20	WW
	NW
	CW

Watt	Lumens
5W	500lm
10W	1000lm
15W	1500lm

Dia(x)	Ht(h)	Cutout
46	62	ø36
55	93	ø40
76	99	ø70

ABBYS


Recessed Fix Downlight

Fixed Deep recessed die cast aluminium fixture. Available in white & black deep front housing for less glare feel. Options of different beam angles as per installation needs.

Suitable for residential & commercial applications.

Beam Angle : 15°, 24°, 38°, 60° / CRI: 80

Driver : Non-Integrated.



IP20	WW
	NW
	CW

Watt	Lumens
9W	900lm
12W	1200lm
20W	2000lm
30W	3000lm

Dia(x)	Ht(h)	Cutout
70	65	ø60
85	75	ø76
95	100	ø86
115	105	ø105

FLORID



Recessed Fix Downlight

Fixed Deep recessed die cast aluminium fixture with colour aluminium reflector. Available in white & black deep front housing for less glare.

Suitable for residential & architectural applications.

Beam Angle : 15°, 25°, 38°, 60° / CRI: 80

Driver : Non-Integrated.

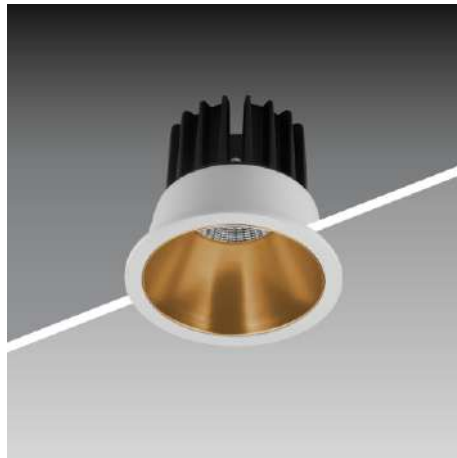

IP20	WW
	NW
	CW

Watt	Lumens
5W	500lm
7W	700lm
12W	1200lm
15W	1500lm

Dia(x)	Ht(h)	Cutout
74	68	ø65
74	68	ø65
85	78	ø76
85	78	ø76


MERLIN

Recessed Fix Downlight

Die cast aluminium fixture with IP body. Merlin is also available in different beam angle Lenses options. Best suited for low Glare Installations due to Black chrome reflector. Suitable for premium residential, museums, hospitality, architectural & commercial applications.

Beam Angle : 18°, 33°, 50° / CRI: 90

Driver : Non-Integrated.



IP54	WW
	NW
	CW

Watt	Lumens
7W	630lm
12W	1080lm
20W	1800lm

Dia(x)	Ht(h)	Cutout
62	60	ø55
83	70	ø75
103	88	ø95

*Reflector Shades Available: Silver Chrome, Rose Gold, Dark Chrome, Matte Gold.

*Reflector Shades Available: Chrome Black, Matte Black.

GLOW FX DL



Recessed Fix Downlight

Cast aluminium ergonomically deep designed body with powder coated ring with additional black colour reflector ring for glare free light effect.

Suitable for hotels, restaurants, residences & commercial applications.

Beam Angle : 13°, 24°, 36° / CRI: 80

Driver : Non-Integrated.



Watt	Lumens
5W	470lm
9W	850lm
12W	1150lm
15W	1425lm

Dia(x)	Ht(h)	Cutout
50	61	ø45
65	75	ø60
72	87	ø65
84	95	ø77



AVIO DL

Recessed Fix Downlight

LED Spot Downlighter light with Aluminium pressure Die Cast heat sink bottom frame with white powder coating. Available in tiltable option upto 15° & Beam angle with options of 24°/ 36° & 60°. Suitable for retail, commercial and high ceiling applications.

Beam Angle : 24° / 36° / 60° / CRI: 80

Driver : Non-Integrated.



Watt	Lumens
30W	3000lm
35W	3500lm
40W	4000lm
45W	4400lm

Dia(x)	Ht(h)	Cutout
114	122	ø104
114	122	ø104
114	122	ø104
114	122	ø104

GLOW FX


Recessed Fix Downlight

Cast aluminium ergonomically designed body with powder coated ring. Superior reflector technology for high lux rendering.

Suitable for residential & architectural applications.

Beam Angle : 13° / 24° / 36° / CRI: 80

Driver : Non-Integrated.



Watt	Lumens
5W	500lm
15W	1500lm

Dia(x)	Ht(h)	Cutout
72	64	ø65
85	78	ø76



DART

Recessed Fix Downlight

LED Downlighter light with Aluminium pressure Die Cast heat sink bottom frame with white powder coating. Available as option in tiltable option & Beam angle with options of 24°/ 36° & 60°. Suitable for retail, commercial and high ceiling applications.

Beam Angle : 24°, 36°, 60° / CRI: 90

Driver : Non-Integrated.



Watt	Lumens
30W	3300lm
35W	3600lm

Dia(x)	Ht(h)	Cutout
128	118	ø103
128	118	ø103


ZEUS 1X

Recessed Fixed Downlight

Cast Aluminium housing with White front powder coating. Deliver absolute glare free & precise light effect. Combination of modules to deliver high efficiency as per application. Suitable for residence, office, hotel lobby & restaurants.

Beam Angle : 30° / CRI: 80

Driver : Non-Integrated.

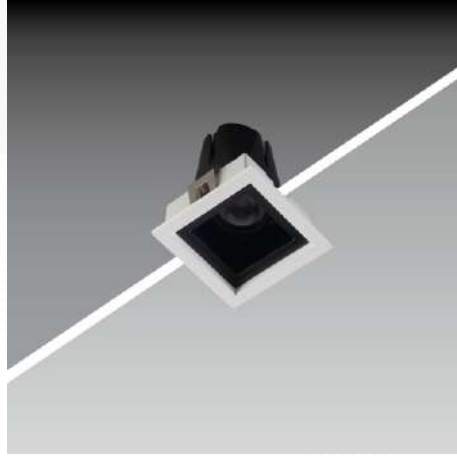

Watt	Lumens
5W	450lm

L(x)	B(b)	Ht(h)	Cutout
52	55	69	48 x 48




ZEUS 3X

Recessed Fixed Downlight

Cast Aluminium housing with White front powder coating. Deliver absolute glare free & precise light effect. Combination of modules to deliver high efficiency as per application. Suitable for residence, office, hotel lobby & restaurants.

Beam Angle : 30° / CRI: 80

Driver : Non-Integrated.

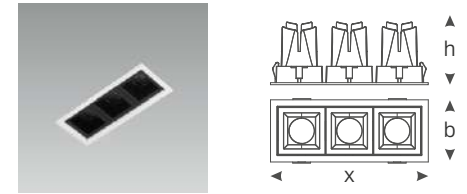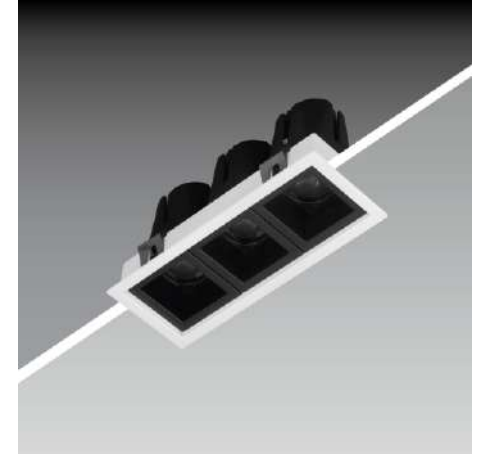

Watt	Lumens
15W	1350lm

L(x)	B(b)	Ht(h)	Cutout
132	52	69	128 x 48


ZEUS 2X

Recessed Fixed Downlight

Cast Aluminium housing with White front powder coating. Deliver absolute glare free & precise light effect. Combination of modules to deliver high efficiency as per application. Suitable for residence, office, hotel lobby & restaurants.

Beam Angle : 30° / CRI: 80

Driver : Non-Integrated.

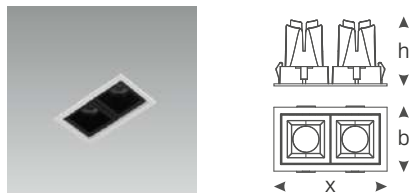

Watt	Lumens
10W	900lm

L(x)	B(b)	Ht(h)	Cutout
92	52	69	88 x 48



ZEUS 4X

Recessed Adjustable Downlight

Cast Aluminium housing with White front powder coating. Deliver absolute glare free & precise light effect. Combination of modules to deliver high efficiency as per application. Suitable for residence, office, hotel lobby & restaurants.

Beam Angle : 24°, 36° / CRI: 90

Driver : Non-Integrated.

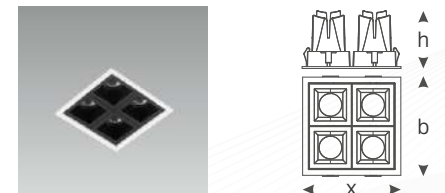

Watt	Lumens
20W	1800lm

L(x)	B(b)	Ht(h)	Cutout
92	92	69	88 x 88

GLOW MINI


Recessed Adjustable Downlight

Designed for Shelf / Wall Wash light application. Reflector based optic for precise beam.

Application for shelf light in Jewellery Stores, hospitality & residential installations.

Beam Angle : 24°, 36° / CRI: 80

Driver : Non-Integrated.



IP20	WW
	NW
	CW

Watt	Lumens
3W	270lm

Dia(x)	Ht(h)	Cutout
60	55	ø54

GLEAM


Recessed Adjustable Downlight

Cast aluminium body with powder coated ring. Superior reflector technology for high lux levels.

Best suited for shops, hotels, restaurants & residences

Beam Angle : 15°, 24°, 38° / CRI: 80

Driver : Non-Integrated.



IP20	WW
	NW
	CW

Watt	Lumens
6W	600lm
9W	900lm
14W	1400lm
18W	1800lm

Dia(x)	Ht(h)	Cutout
88	50	ø75
88	50	ø75
110	70	ø100
110	70	ø100

GLOW


Recessed Adjustable Downlight

Cast aluminium body with powder coated ring. Superior reflector technology for high lux levels. Soothing & comfort light appearance.

Suitable for residential & architectural applications.

Beam Angle : 24°, 38° / CRI: 80

Driver : Non-Integrated.



IP20	WW
	NW
	CW

Watt	Lumens
15W	1500lm
22W	2200lm

Dia(x)	Ht(h)	Cutout
110	82	ø75
110	97	ø94

GLAZE


Recessed Adjustable Downlight

Die Cast Aluminium housing with dark chrome reflector. Glare free deep recessed lens based optic for soft & soothing light.

Suitable for commercial, hospitality & residential solutions

Beam Angle : 24°, 36° / CRI: 90

Driver : Non-Integrated.



IP20	WW
	NW
	CW

Watt	Lumens
8W	750lm
10W	950lm
12W	1150lm
25W	1400lm

Dia(x)	Ht(h)	Cutout
70	77	ø65
70	77	ø65
88	88	ø80
88	88	ø80

FLARE RD


Recessed Adjustable Downlight

Unique design fixture with cast aluminium heat sink powder coated ring. Swivel & tilt option for direction light & wall washing. Reflector designed for soothing light output.

Suitable for residential, office, hotel & restaurant lighting

Beam Angle : 15°, 24°, 36° / CRI: 80

Driver : Non-Integrated.



IP20	WW
	NW
	CW

Watt	Lumens
5W	450lm
8W	720lm
12W	1080lm
15W	1350lm

Dia(x)	Ht(h)	Cutout
85	64	ø70
85	69	ø70
95	76	ø75
95	80	ø75


ERICA L

Recessed Adjustable Downlight

Deep recessed tiltable die cast aluminium fixture with Choice of colour reflectors to match interiors & ambience. Best suited for low Glare Installations. Suitable for residential, museums, hospitality, architectural, retail & commercial applications.

Beam Angle : 24°, 36° / CRI: 90

Driver : Non-Integrated.



IP20	WW
	NW
	CW

Watt	Lumens
6W	540lm
8W	720lm
12W	1080lm

Dia(x)	Ht(h)	Cutout
60	75	ø50
72	83	ø65
86	104	ø75

*Reflector Shades Available: Black Chrome, Matte Black, Matte White, Gold & Satin Silver.

FLARE DR


Recessed Adjustable Downlight

Unique design fixture with cast aluminium heat sink powder coated ring. Swivel & tilt option for direction light & wall washing. Reflector designed for soothing light output.

Suitable for residential, office, hotel & restaurant lighting

Beam Angle : 15°, 24°, 36° / CRI: 80

Driver : Non-Integrated.



IP20	WW
	NW
	CW

Watt	Lumens
5W	450lm
8W	720lm
12W	1080lm
15W	1350lm

Dia(x)	Ht(h)	Cutout
85	76	ø75
85	81	ø75
100	100	ø90
100	105	ø90


ERICA R

Recessed Adjustable Downlight

Deep recessed tiltable die cast aluminium fixture with Choice of colour reflectors to match interiors & ambience. Best suited for low Glare Installations. Suitable for residential, museums, hospitality, architectural, retail & commercial applications.

Beam Angle : 15°, 24°, 36° / CRI: 90

Driver : Non-Integrated.



IP20	WW
	NW
	CW

Watt	Lumens
12W	1020lm
20W	1700lm
25W	2100lm
30W	2550lm

Dia(x)	Ht(h)	Cutout
86	104	ø75
106	119	ø95
132	145	ø120
132	145	ø120

*Reflector Shades Available: Black Chrome, Matte Black, Matte White, Gold & Satin Silver.

TUBUS D

Surface LED Fixed Downlight

Made of die-cast aluminum for corrosion resistance and heat dissipation. This spotlight features a high-quality reflector for precise light control, anti-glare and eye protection.



Beam Angle : 15°, 24°, 36° / CRI: 80
Driver : Integrated.



IP20

WW
NW
CW

Watt	Lumens
7W	630lm
12W	1050lm
15W	1350lm
18W	1620lm

Dia(x)	Ht(h)
55	80
75	115
75	115
75	130

*Reflector Shades Available: Silver Chrome, Rose Gold, Dark Chrome, Matte Gold.

GLINT

LED MR16 Module

Design as an effective replacement for 50W MR16 Halogen lamp, saving up to 80% Energy. Slender aluminum housing and ease of installation makes it ideal for spot light application in jewellery and accessories, hotels, restaurants and residences.



Beam Angle : 15°, 24°, 36° / CRI: 80
Driver : Non-Integrated.



IP20

WW
NW
CW

Watt	Lumens
9W	900lm
12W	1200lm

Dia(x)	Ht(h)
49	80
49	80





Trackspot Wallwasher

Track lights can be used to highlight important features in a home. They're perfect for lighting artwork, photos, or unique architectural elements that you might have. You can also position them to illuminate dark corners of rooms that ambient or natural light isn't able to reach.

Wall washing illuminates a vertical surface with uniform brightness. Wall washing draws attention to the wall, and can be used to accentuate an entrance, fireplace, or artwork. The light reflected from matte surface walls can make a room appear bright and will provide a soft, diffuse light in the room.




AVIO NX

Recessed Adjustable Wallwasher

Cast Aluminium housing white powder coating. Recessed Spot with zoom tilt for wall illumination & focussed downlight applications. Optimized heat sink design gives better thermal management to ensure long lifetime. Suitable for retail, commercial and high ceiling applications.

Beam Angle : 24°, 40°, 60° / CRI: 80
Driver : Non-Integrated.



IP20

WW
NW
CW

Watt	Lumens
20W	2000lm
25W	2600lm
30W	3100lm
40W	4200lm


Dia(x)	Ht(h)	Cutout
136	100	ø130
136	100	ø130
156	118	ø150
156	118	ø150

AVIO NX SQ 2X

Recessed Adjustable Wallwasher

Square zoom big 2XSQ1 Energy efficient LED spot light Luminaire elegant square look PDC frame having swivelling of heatsink to adjust beam Horizontal 0°-350° & Vertical 0° - 45°. Suitable for retail, commercial and high ceiling applications.

Beam Angle : 15°, 24°, 38°, 60° / CRI: 80
Driver : Non-Integrated.



IP20

WW
NW
CW

Watt	Lumens
20W x 2	4000lm
25W x 2	5200lm
30W x 2	7200lm
40W x 2	8400lm


L(x)	B(b)	Ht(h)	Cutout
300	150	107	290 x 136
300	150	107	290 x 136
300	150	107	290 x 136
300	150	107	290 x 136

AVIO NX SQ 1X

Recessed Adjustable Wallwasher

Square zoom big 1XSQ1 Energy efficient LED spot light Luminaire elegant square look PDC frame having swivelling of heatsink to adjust beam Horizontal 0°-350° & Vertical 0° - 45°. Suitable for retail, commercial and high ceiling applications.

Beam Angle : 24°, 40°, 60° / CRI: 80
Driver : Non-Integrated.



IP20

WW
NW
CW

Watt	Lumens
20W	2000lm
25W	2600lm
30W	3100lm
40W	4200lm


L(x)	B(b)	Ht(h)	Cutout
150	150	107	140 x 140
150	150	107	140 x 140
150	150	107	140 x 140
150	150	107	140 x 140

DELTA

Recessed Adjustable Wallwasher

Good architectural lighting puts the focus on people and their visual tasks. This presupposes precise light control. The optical cut-off up to 40° achieves maximum visual comfort and glare-free lighting enjoyment.

Beam Angle : 24°, 36°, 60° / CRI: 80
Driver : Non-Integrated.



IP20

WW
NW
CW

Watt	Lumens
20W	2200lm
25W	2750lm
30W	3300lm
35W	3800lm

Dia(x)	Ht(h)	Cutout
132	108	ø123
132	108	ø123
145	147	ø139
145	147	ø139

CANE


Track Spotlight

Unique premium designed track light fixture. Made of aluminium housing, powder coated finish with a premium reflector for a bright punch with a black front ring to reduce glare. Available in Black & White powder finish. Perfect Choice for Retail & Shop lighting applications.

Beam Angle : 15°, 38°, 45°, 60° / CRI: 80
Driver : Non-Integrated.

IP20

WW
NW
CW

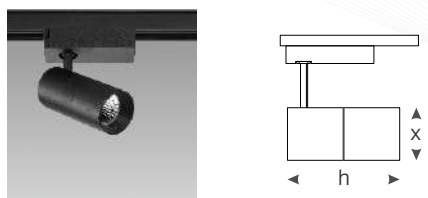

Watt	Lumens
7W	700lm
12W	1200lm
20W	2000lm
30W	3000lm

Dia(x)	Ht(h)
50	110
60	125
80	153
90	175

COMET


Track Spotlight

The powerful spotlight varied beam angles ensure pinpoint, powerful, and energy-efficient illumination. High colour-rendering values create ideal lighting conditions for presentation, beyond simply in retail Shoppes, Showrooms & Malls.

Beam Angle : 19°, 24°, 36°, 60° / CRI: 90
Driver : In-Track Driver.

IP20

WW
NW
CW

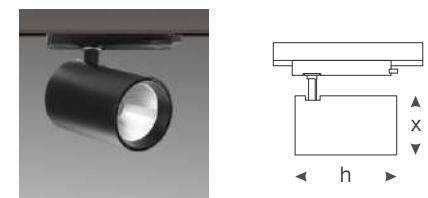

Watt	Lumens
20W	2600lm
25W	3250lm
30W	3900lm
35W	4200lm

Dia(x)	Ht(h)
80	100
80	100
90	130
90	130

OCTA

Track Spotlight

Robust Construction with Aluminium die cast body. Better thermal management ensuring longer life due to separate driver from luminaire & optimized heat sink design. Fixture has smooth 90° swivel with 350° rotation. Perfect Choice for Retail & Shop lighting applications.

Beam Angle : 19°, 25°, 45°, 77° / CRI: 80
Driver : Non-Integrated.

IP20

WW
NW
CW



Watt	Lumens
15W	1500lm
18W	1800lm
21W	2100lm
25W	2500lm

Dia(x)	Ht(h)
83	131
83	131
83	131
83	131

VISTA


Track Spotlight

Perfect track light with Inbuilt driver and made of high quality aluminium outer body with an appropriate high quality HEAT SINK to cater to utility stores and track spot applications. Suitable for shops, showrooms and malls.

Beam Angle : 15°, 24°, 38°, 60° / CRI: 80
Driver : Integrated.

IP20

WW
NW
CW

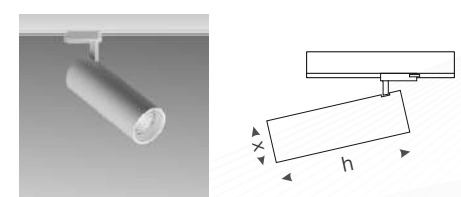

Watt	Lumens
30W	3000lm
35W	3500lm
40W	4000lm

Dia(x)	Ht(h)
80	200
80	220
80	220

GLOW

Track Spotlight

Unique premium designed track fixture. Made of die cast aluminium, powder coated finish with superior reflector and LED COB. Compatible with 3-circuit power track. Consistency of colour temperature.




Beam Angle : 24°, 36° / CRI: 80

Driver : Integrated.

IP20

WW
NW
CW



Watt	Lumens
18W	1800lm
35W	3500lm

Dia(x)	Ht(h)
80	128
113	147

OCTA SF

Track Spotlight

Robust Construction with Aluminium die cast body. Better thermal management ensuring longer life due to separate driver from luminaire & optimized heat sink design. Fixture has smooth 90° swivel with 350° rotation. Perfect Choice for Retail & Shop lighting applications.




Beam Angle : 19°, 25°, 45°, 77° / CRI: 80

Driver : Non-Integrated.

IP20

WW
NW
CW



Watt	Lumens
15W	1500lm
18W	1800lm
21W	2100lm
25W	2500lm

Dia(x)	Ht(h)
83	142
83	142
83	142
83	142





Panel Lights Grid lights

LED Panel Lights are Ceiling lights which can be circular or square in shape. They produce bright illumination through LEDs. LED Panels can be recessed, surface mounted or suspended from the ceiling. Panel lighting is designed for both residential and commercial applications. This type of lighting fixture is made to replace conventional fluorescent ceiling lights, and designed to mount on suspended grid ceilings or recessed ceilings.

Lighting of a room or building by means of flat sheets of material that glow brightly when a coating of a phosphor is excited by an electrical charge. LED panel lights are some of the most efficient lighting options in the market. They have grown in popularity and are used widely because of their energy-efficiency, and can save more than 80% of energy while producing brighter and softer light than their traditional counterparts.

BRILLO 2 X 2


Recessed LED Panel Light

Spotless, uniform, soft and bright diffused illumination. Best suited for use as ambient light in office and commercial application.

Can be recessed in a gypsum ceiling or integrated with a modular grid ceiling.

Beam Angle : 120° / CRI: 80

Driver : Non-Integrated.



Watt	Lumens
36W	3600lm

L(x)	B(b)	Ht(h)	Cutout
595	595	55	575 X 575



BOLT ROUND

Recessed LED Panel Light

Symmetrical in a round profile, our Bolt series is a perfect choice for diffused lighting and a relaxing atmosphere. A favoured choice among the downlights family, these can be seamlessly installed across high or low ceilings.

Beam Angle : 110° / CRI: 90

Driver : Non-Integrated.



Watt	Lumens
10W	1000lm
15W	1500lm
20W	2000lm
25W	2500lm

Dia(x)	Ht(h)	Cutout
150	40	ø135
150	40	ø135
150	40	ø135
150	40	ø135

BRILLO 4 X 1


Recessed LED Panel Light

Spotless, uniform, soft and bright diffused illumination. Best suited for use as ambient light in office and commercial application.

Can be recessed in a gypsum ceiling or integrated with a modular grid ceiling.

Beam Angle : 120° / CRI: 80

Driver : Non-Integrated.



Watt	Lumens
36W	3600lm

L(x)	B(b)	Ht(h)	Cutout
329	1200	55	1185 x 308



BOLT SQUARE

Recessed LED Panel Light

Symmetrical in a square profile, our Bolt series is a perfect choice for diffused lighting and a relaxing atmosphere. A favoured choice among the downlights family, these can be seamlessly installed across high or low ceilings.

Beam Angle : 110° / CRI: 90

Driver : Non-Integrated.



Watt	Lumens
10W	1000lm
15W	1500lm
20W	2000lm
25W	2500lm

L(x)	B(b)	Ht(h)	Cutout
152	152	40	135 x 135
152	152	40	135 x 135
152	152	40	135 x 135
152	152	40	135 x 135

BEZEL ROUND




Recessed LED Panel Light

Recessed Mounted Backlit Panel of Polycarbonate Housing & milky acrylic diffuser. Wide beam angle of 120°.

Suitable for Residences & shops

Beam Angle : 120° / CRI: 80

Driver : Integrated.

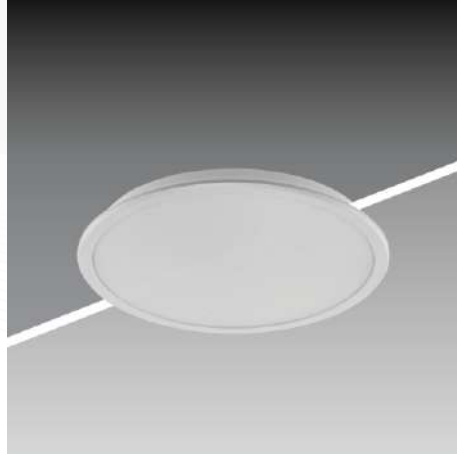

Watt	Lumens
8W	750lm
15W	1500lm
20W	2000lm

Dia(x)	Ht(h)	Cutout
116	38	ø100
166	38	ø105
220	38	ø205




PLANO ROUND

Recessed LED Panel Light

The sleek, aluminium casting with powder coating is perfect for areas where the inside ceiling height is a constraint. Ideal for residential application with less ceiling space.

Beam Angle : 120° / CRI: 80

Driver : Non-Integrated.



Watt	Lumens
10W	900lm
15W	1350lm
20W	1800lm

Dia(x)	Ht(h)	Cutout
120	25	ø105
170	25	ø155
225	25	ø210

BEZEL SQUARE




Recessed LED Panel Light

Recessed Mounted Backlit Panel of Polycarbonate Housing & milky acrylic diffuser. Wide beam angle of 120°.

Suitable for Residences & shops

Beam Angle : 110° / CRI: 80

Driver : Integrated.

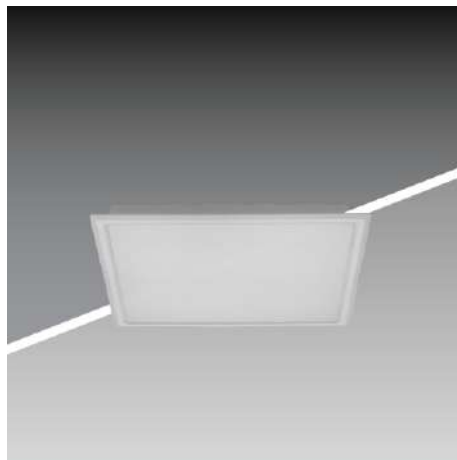

Watt	Lumens
8W	750lm
15W	1500lm
20W	2000lm

L(x)	B(b)	Ht(h)	Cutout
116	116	38	100 x 100
166	166	38	150 x 150
220	220	38	205 x 205





PLANO SQUARE

Recessed LED Panel Light

The sleek, aluminium casting with powder coating is perfect for areas where the inside ceiling height is a constraint. Ideal for residential application with less ceiling space.

Beam Angle : 120° / CRI: 80

Driver : Non-Integrated.

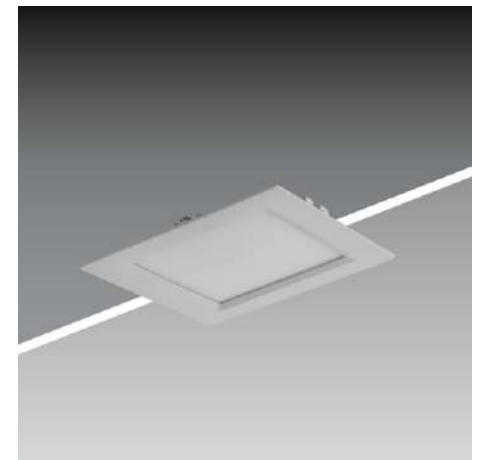

Watt	Lumens
10W	900lm
15W	1350lm
20W	1800lm

L(x)	B(b)	Ht(h)	Cutout
120	120	25	105 x 105
170	170	25	105 x 105
225	225	25	210 x 210

VERVE S ROUND


Recessed LED Panel Light

Die cast Aluminium housing with white powder coating & slim ring deep recess frame. Available in White & Black frame. Diffuser light gives a glare free but bright light effect. Suitable for residence, hotels, office & commercial spaces.

Beam Angle : 110° / CRI: 80
Driver : Non-Integrated.

IP20

WW
NW
CW



Watt	Lumens
12W	1050lm
18W	1650lm
24W	2200lm

Dia(x)	Ht(h)	Cutout
120	49	ø110
154	54	ø144
175	55	ø165

VIVA


Recessed LED Panel Light

Die cast Aluminium housing with white powder coating & slim ring with partial recess frame. Diffuser light gives a glare free but bright light effect. Suitable for residence, hotels, office & commercial spaces.

Beam Angle : 120° / CRI: 80
Driver : Non-Integrated.

IP20

WW
NW
CW



Watt	Lumens
5W	450lm
10W	1000lm
15W	1500lm
20W	2000lm

Dia(x)	Ht(h)	Cutout
85	45	ø70
110	44	ø90
166	44	ø140
190	46	ø160

VERVE S SQUARE




Recessed LED Panel Light

Die cast Aluminium housing with white powder coating & slim ring deep recess frame. Available in White & Black frame. Diffuser light gives a glare free but bright light effect. Suitable for residence, hotels, office & commercial spaces.

Beam Angle : 110° / CRI: 80
Driver : Non-Integrated.

IP20

WW
NW
CW

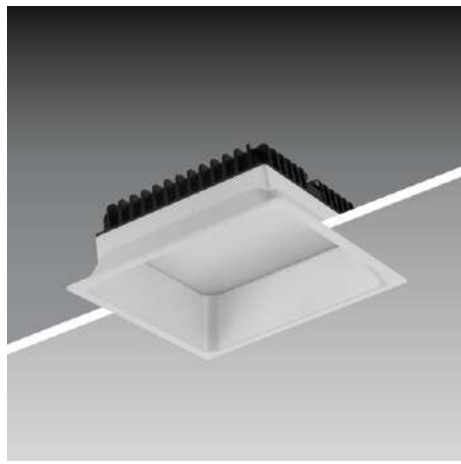

Watt	Lumens
12W	1050lm
18W	1650lm

L(x)	B(b)	Ht(h)	Cutout
110	110	50	100 x 100
145	145	55	135 x 135

LUNA


Surface LED Panel Light

Surface led downlight for ceiling that comes in colours: Warm White, Natural White & Cool Daylight. The surface downlighter has a strong and high-quality LED light output that can be a great choice for your living room, corridor and for display in shops.

Beam Angle : 120° / CRI: 80
Driver : Integrated.

IP20

WW
NW
CW



Watt	Lumens
12W	1080lm
18W	1620lm
24W	2160lm

Dia(x)	Ht(h)
120	36
150	36
200	36



Linear Cove lights

Linear lighting is defined as a linear shape luminaries (opposed to square or round). These luminaries long optics to distribute the light over a more narrow area than with traditional lighting. Linear light fixtures can be installed in three main ways - mounted on surfaces, suspended in air, or built into, or 'recessed' in, surfaces. Regardless, they are a popular choice in many spaces, such as offices, retail malls and more.

Cove lighting is a form of indirect lighting built into ledges, recesses, or valances in a ceiling or high on the walls of a room. It directs light up towards the ceiling and down adjacent walls. These lights effortlessly grant a glow to your space and serve as an indirect source of lighting. Moreover, they appear diffused and muted overall. The best thing about cove lighting is also that you can include them easily in your ceiling design and they are easy to maintain.





LYNQ

Recessed LED Linear Downlight

Cast aluminium housing with white powder coating. Delivered absolute glare-free light effect. Combination of modules to deliver high efficiency as per application. Suitable for Residence, Office, Show Rooms, Hotel Lobby & Restaurants.

Beam Angle : 24°, 36° / CRI: 80
Driver : Non-Integrated.

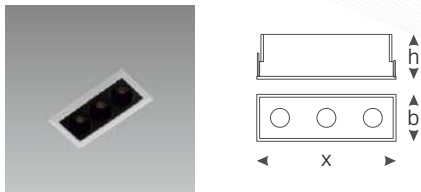

Watt	Lumens
8W	750lm
15W	1400lm




L(x)	B(b)	Ht(h)	Cutout
95	45	50	87 x 37
175	45	50	165 x 37

FILA RECESSED

Recessed LED Linear Light

Extruded aluminium profile with white/black or any other housing color as per choice. Standard length of 1200-1210mm and can be customised in any length. Built-in driver makes it easy to install. Bottom down maintenance.

Beam Angle : Diffused / CRI: 80
Driver : Non-Integrated.

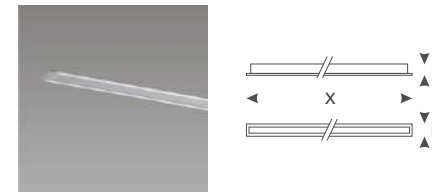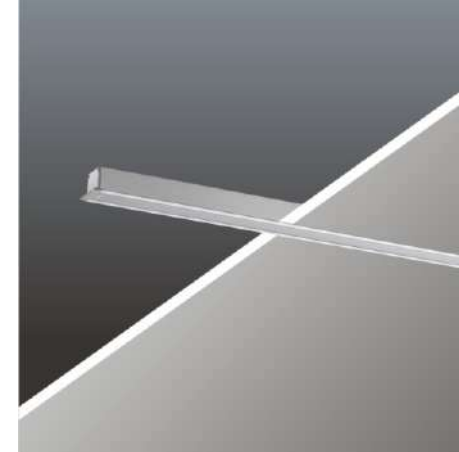

Model	Watt	Lumens
4540	30W	3000lm
7040	30W	3000lm
9065	30W	3000lm


L(x)	B(b)	Ht(h)	Cutout
1200	45	40	1190 x 35 x 40
1205	70	40	1190 x 55 x 40
1210	95	65	1190 x 75 x 65

SPAN

Surface LED T5 Tubelight

A highly efficient replacement for T5 tubelight with energy savings of upto 50%. Sleek and elegant housing with built-in driver. Ideal for both domestic and commercial applications. Up to 20 fixtures linkable in series without dark patch.

Beam Angle : Diffused / CRI: 80
Driver : Non-Integrated.

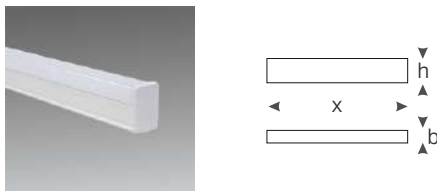

Watt	Lumens
10W	1000lm
20W	2000lm


L(x)	B(b)	Ht(h)
600	20	30
1200	20	30

FILA SURFACE

Surface LED Linear Light

Extruded aluminium profile with white/black or any other housing color as per choice. Standard length of 1190mm and can be customised in any length. Built-in driver makes it easy to install. Bottom down maintenance.

Beam Angle : Diffused / CRI: 80
Driver : Non-Integrated.



Model	Watt	Lumens
3535	30W	3000lm
5272	30W	3000lm
9580	30W	3000lm


L(x)	B(b)	Ht(h)
1190	35	35
1190	52	72
1190	95	80

FILA PENDANT

Suspended LED Linear Light

Cast aluminium housing with white powder coating. Delivered absolute glare-free light effect. Combination of modules to deliver high efficiency as per application. Suitable for Residence, Office, Show Rooms, Hotel Lobby & Restaurants.

Beam Angle : Diffused / CRI: 80
Driver : Non-Integrated.



Model	Watt	Lumens
3535	20W	2000lm
5272	25W	2500lm
7490	35W	3500lm




L(x)	B(b)	Ht(h)
1224	35	35
1224	52	72
1224	74	90

ALLOY RECESSED

Recessed LED Aluminium Profile

The aluminium profiles are in anodized aluminium. The Flexible led strips can be glued into the profile. The profile can simply be sawn to any required length or ordered in the required custom length.

Beam Angle : Diffused / CRI: 80
Driver : Non-Integrated.

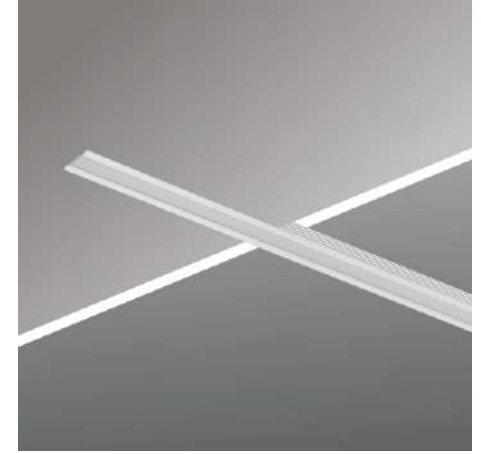

Watt / Mtr	Lumens / Mtr
5W	400lm
12W	800lm
18W	1500lm
24W	1700lm


L(x)	B(b)	Ht(h)
5000	13	10
5000	13	10
5000	13	10
5000	13	10

NEON FLEX

Surface LED Aluminium Profile

LED Flexible Neon Light is basically housed in the plastic jacket which could be transparent, opalescent, semi-transparent or transparent colour and the LED could be Red, Orange, Blue, Yellow, Green, Amber, White, Pink and Purple etc.

Beam Angle : Diffused / CRI: 80
Driver : Non-Integrated.

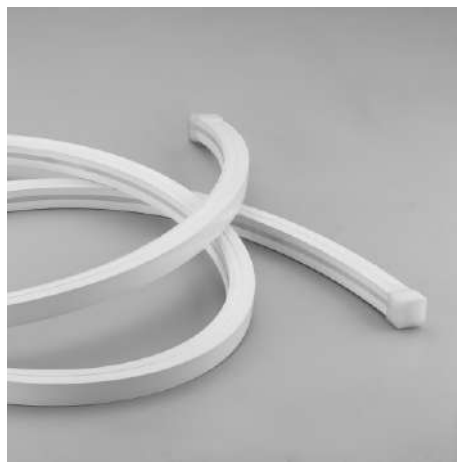

Watt / Mtr	Lumens / Mtr
8W	800lm
8W	800lm
8W	800lm
8W	800lm


L(x)	B(b)	Ht(h)
5000	12	6
5000	14	14
5000	16	16
5000	20	10

ALLOY SURFACE

Surface LED Aluminium Profile

The aluminium profiles are in anodized aluminium. The Flexible led strips can be glued into the profile. The profile can simply be sawn to any required length or ordered in the required custom length.

Beam Angle : Diffused / CRI: 80
Driver : Non-Integrated.



Watt / Mtr	Lumens / Mtr
5W	400lm
12W	800lm
18W	1500lm
24W	1700lm

L(x)	B(b)	Ht(h)
5000	20	10
5000	20	10
5000	20	10
5000	20	10

ALLOY CORNER

Surface Corner Aluminium Profile


Cast aluminium housing with white powder coating. Delivered absolute glare-free light effect. Combination of modules to deliver high efficiency as per application. Suitable for Residence, Office, Show Rooms, Hotel Lobby & Restaurants.



Beam Angle : 24°, 36° / CRI: 80
Driver : Non-Integrated.

IP20

WW
NW
CW



Watt / Mtr	Lumens / Mtr
5W	400lm
12W	800lm
18W	1350lm
24W	1700lm

L(x)	B(b)	Ht(h)
5000	16	16
5000	16	16
5000	16	16
5000	16	16



SERIE 2835

Suspended LED Linear Light


Impressive in dimension and incredibly light, Serie series packs high illumination in a small package: with 120 LEDs studded per metre. These strip lights enrich the architectural lighting family with their warming comfort.



Beam Angle : Assymetric / CRI: 80
Driver : Non-Integrated.


IP20

WW
NW
CW



Watt / Mtr	Lumens / Mtr
5W	430lm
12W	960lm
18W	1500lm
24W	2000lm

L(x)	B(b)
5000	10
5000	10
5000	10
5000	10

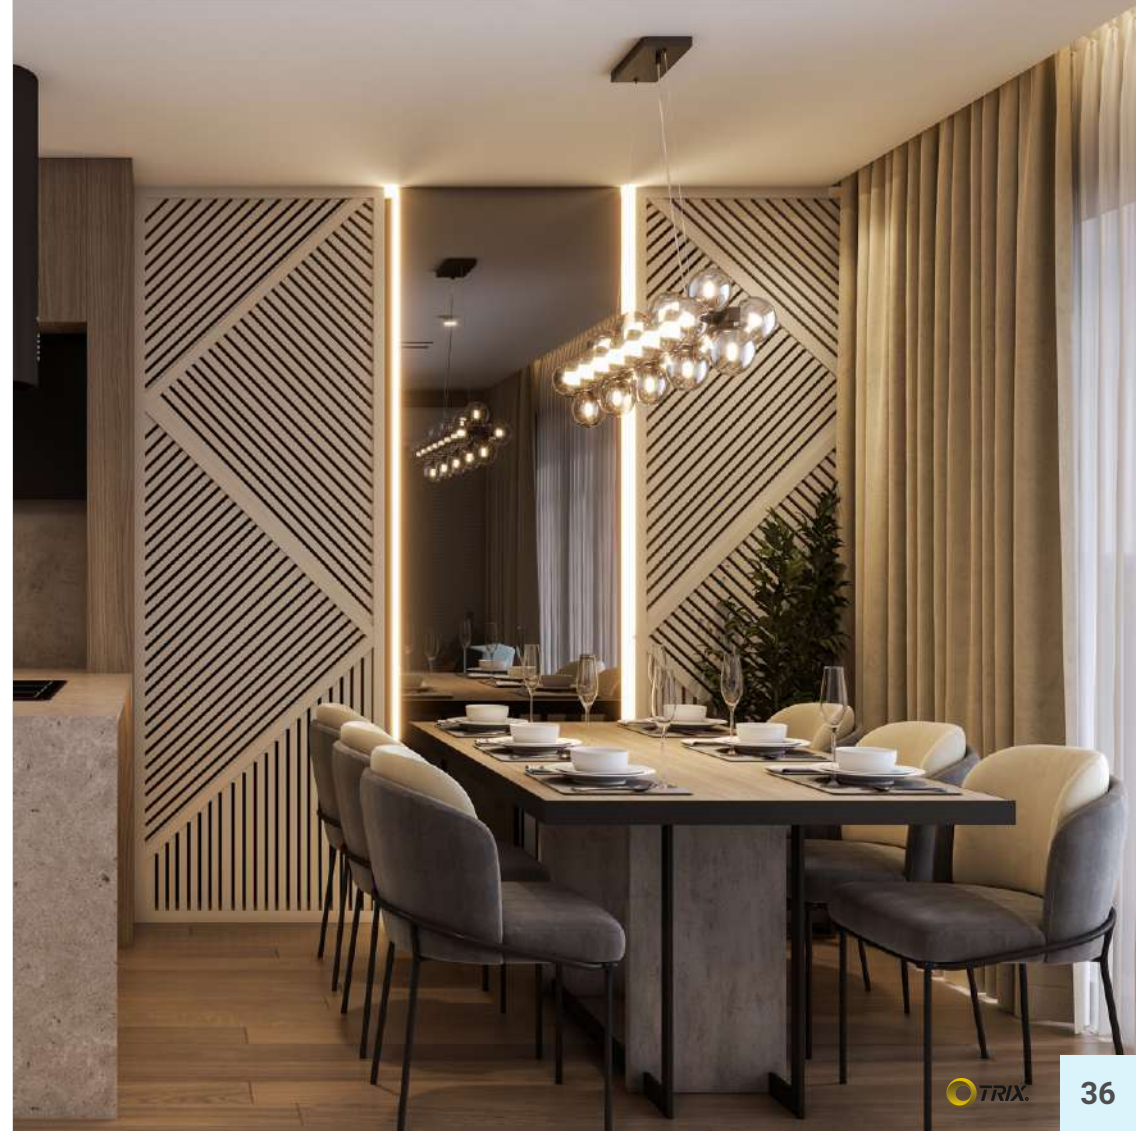



MGT-23 Magnetic series

Magnetic Lighting is a low voltage system for indoor lighting. It consists of an assembly that can hold various light sources while using magnetic attraction. The magnetic track lighting system can have various lengths, shades and sizes. A magnet track can support different led lights, so it can be used in a wider range of applications. It can slide to any position easily without any auxiliary tools. Magnetic track light is a combined product, mainly composed of three parts: track, light body and switching power supply. Through the magnetic technology, the lamp components are adsorbed on the track.

The magnetic track is generally DC48V safety voltage, under normal circumstances, harmless to humans.


MGT23 - TS

Magnetic Cylinder Trackspot

The Magnetic track spotlights are based on LED track lights with track heads with magnets, with low-voltage DC48V input. The Spot fixture is made of die cast aluminium with built in DCDC converters. Suitable for kitchen room, dining room, and wall washer lighting.

Beam Angle : 24° / CRI: 90

Driver : Track Integrated



IP20	WW
	NW
	CW

Watt	Lumens
5W	500lm
10W	1000lm
15W	1500lm
24W	2400lm

Dia(x)	Ht(h)
35	80
45	100
55	120
65	140

MGT23 - WWG

Magnetic Grill Wallwasher

Magnetic die cast aluminium wallwasher is adjustable spotlight is designed as grid spotlight. It is adjustable to required degree & can also be used as 90° adjustment as non-directional lighting. DALI/Smart dimmable options available.

Beam Angle : 24° / CRI: 90

Driver : Track Integrated



IP20	WW
	NW
	CW

Watt	Lumens
6W	600lm
12W	1200lm

L(x)	B(b)	Ht(h)
112	23	113
220	23	113


MGT23 - RS

Magnetic Sphere Trackspot

Die cast aluminium round magnetic spotlight with focussed spotlight. Swivel option for more flexibility and better options to highlight the space or subject illumination. Suitable for interiors illumination and focusing on subjects.

Beam Angle : 24° / CRI: 90

Driver : Track Integrated



IP20	WW
	NW
	CW

Watt	Lumens
12W	1200lm

Dia(x)	Ht(h)
110	100


MGT23 - FXG

Magnetic Fixed Grill Downlight

The magnetic die cast aluminium grid spotlight is a directional lighting fixture with grill lens-based reflector with high CRI led. Suitable for use with magnetic line lights as basic lighting in the living room, dining room, corridor, etc.

Beam Angle : 24° / CRI: 90

Driver : Track Integrated



IP20	WW
	NW
	CW

Watt	Lumens
6W	600lm
12W	1200lm
18W	1800lm
24W	2400lm
36W	3600lm
54W	5400lm


L(x)	B(b)	Ht(h)
112	23	45
220	23	45
328	23	45
436	23	45
652	23	45
976	23	45

MGT23 - PDT RD

Magnetic Sphere Pendant


The magnetic die cast aluminium round sphere shape pendant light is a with hanging ropes for suspended installation as decorative lighting. It is generally used as auxiliary lighting and is mostly used in the room corners, bedside table, etc.

Beam Angle : 24° / CRI: 90
Driver : Integrated



Watt	Lumens
12W	1200lm

Dia(x)	Ht(h)
110	100





MGT23 - DWW

Magnetic Diffused Wallwasher


Magnetic linear diffuser adjustable die cast aluminium fixture with front PMMA diffuser. It has a wide distribution of 120° beam angle & high CRI. Suitable for wide spread focussing on Walls or structures or for general lighting in large spaces like halls, living rooms, offices, etc.

Beam Angle : Diffused / CRI: 90
Driver : Non-Integrated.



Watt	Lumens
6W	600lm
12W	1200lm
18W	1800lm

L(x)	B(b)	Ht(h)
112	23	113
220	23	113
328	23	113



MGT23 - DECO

Magnetic Decorative Pendant


The magnetic pendant light is a cylinder downlight with hanging ropes for suspended installation as decorative lighting & is made of die cast aluminium and glass. It spreads diffused light around 360D due to diffused glass.

Beam Angle : 24° / CRI: 90
Driver : Integrated



Watt	Lumens
7W	700lm

Dia(x)	Ht(h)
40	300


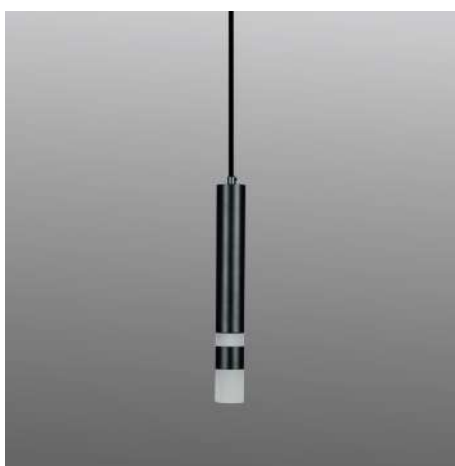


MGT23 - FXD

Magnetic linear Fixed Diffused



Magnetic linear diffuser die cast aluminium fixture with front PMMA diffuser. It has a wide distribution of 120° beam angle & high CRI for general lighting in large spaces like living rooms, offices, etc. with high CRI.

Beam Angle : Diffused / CRI: 90
Driver : Non-Integrated.



Watt	Lumens
6W	600lm
12W	1200lm
18W	1800lm
24W	2400lm
36W	3600lm
54W	5400lm

L(x)	B(b)	Ht(h)
112	23	45
220	23	45
328	23	45
436	23	45
652	23	45
976	23	45

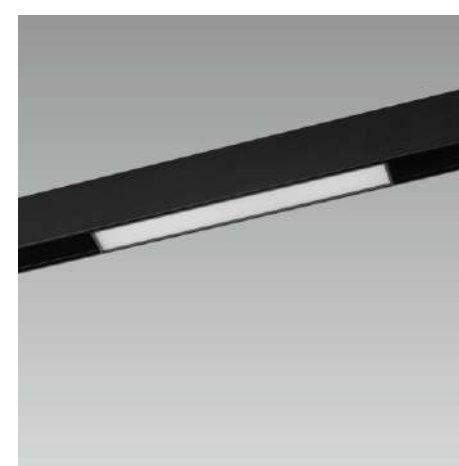

MGT23 - PDT N

Magnetic Decorative Pendant

The magnetic pendant light is a die cast aluminium cylinder downlight with hanging ropes for suspended installation as decorative lighting. It is generally used as auxiliary lighting and is mostly used in the study room, bedside table / dining table or above the commercial billing counters.

Beam Angle : 24°, 36° / CRI: 90

Driver : Non-Integrated.



IP20

WW
NW
CW

Watt	Lumens
10W	1000lm

Dia(x)	Ht(h)
50	300

MGT23 - PDT D

Magnetic Decorative Pendant

The magnetic pendant light is a two step light source cylinder downlight with hanging ropes for suspended installation as decorative lighting. It is generally used as ambience pendant light and is mostly used in the study room, room corners, and above the dining table.

Beam Angle : Diffused / CRI: 90

Driver : Non-Integrated.



IP20

WW
NW
CW


Watt	Lumens
10W	1000lm

Dia(x)	Ht(h)
60	320

MAGNETIC TRACKS



TRIMLESS



RECESSED



DEEP SURFACE



LOW SURFACE

MAGNETIC TRACKS ACCESSORIES




Power Head




Straight Joint



Flexible Joint



L Joint Surface



L Joint Recessed



Suspension Kit



Adapter Long



Adapter Small

*4 Wire Track. *Available Color - Black.
*Available in 1Mtr./2Mtr. Length



Industrial & Outdoor

Factory lights, also known as high bay lights, traditional light source factory lights are composed of a light source, a ballast, a trigger, a lampshade and a lamp holder. LED lamps are used to create a modern industrial lighting. LED lights have the following benefits : High level of energy efficiency: Coefficient of performance of modern LED lamps is approaching 100%.

Artificial Light is a necessity in our everyday lives. It helps us to work during hours of poor lighting and illuminate our night. Most of the current technology heavily relies on artificial light.




SOLUS

Highbay Surface/Pednat Light

High Performance LED HIGHBAY luminaires with die cast aluminum housing are high intensity indoor / outdoor lights. These lights are designed to illuminate large areas with their wide dispersion without affecting the environment.

Beam Angle : Flood / CRI: 80
Driver : Non Integrated



IP65

WW
NW
CW

Watt	Lumens
50W	6000lm
80W	9600lm
100W	12000lm
120W	15600lm
150W	19500lm
180W	23400lm
200W	26000lm
250W	32500lm



Dia(x)	Ht(h)
50	165
60	230
60	230
70	320
70	320
70	320
85	370
85	370

NEVA

LED Streetlight

This streetlight luminaires comprises of die cast aluminum housing with powder coated & toughened glass / poly-carbonate lens plate.

Beam Angle : Flood / CRI: 80
Driver : Non Integrated

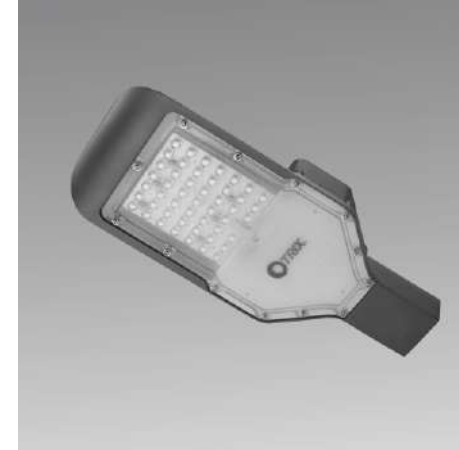


IP65

WW
NW
CW

Watt	Lumens
20W	2000lm
24W	2400lm
30W	3000lm
60W	6000lm
70W	7000lm
90W	9000lm
100W	10000lm
120W	12000lm

L(x)	B(b)	Ht(h)
330	124	47
288	107	53
288	107	53
406	162	55
406	162	55
630	221	74
630	221	74
630	221	74

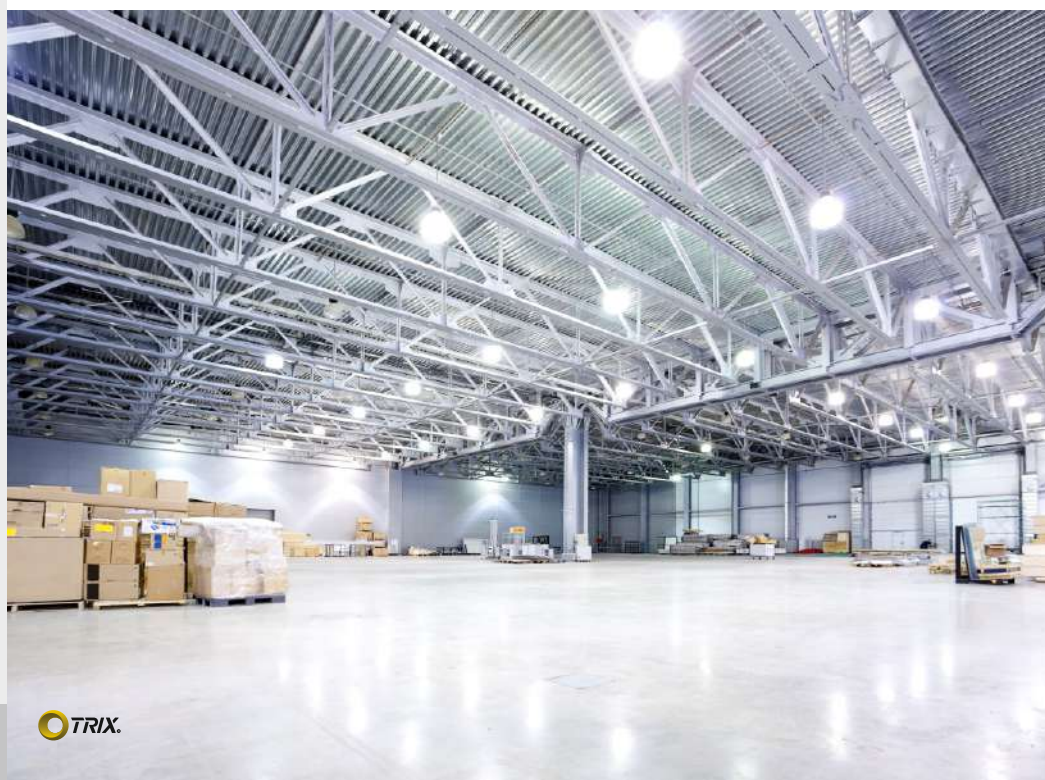

INNOVA

Linear LED Downlight


This Industrial luminaries comprises of dust & weatherproof polycarbonate housing, silicon gasket with clear polycarbonate diffuser.



Beam Angle : Diffused / CRI: 80
Driver : Integrated

IP65

WW
NW
CW

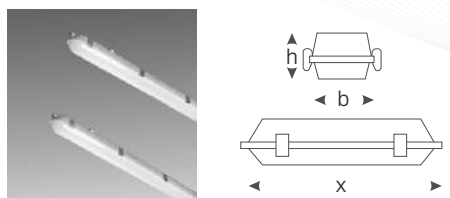

Watt	Lumens
20W	1800lm
40W	3600lm
60W	5400lm

L(x)	B(b)	Ht(h)
610	100	75
1210	100	75
1510	100	75



ARENA

Floodlight


This floodlight luminaries comprises of die cast aluminum housing with powder coated & toughned glass. This lights are designed to illuminate large areas with their wide dispersion.



Beam Angle : Flood / CRI: 80
Driver : Integrated

IP20

WW
NW
CW

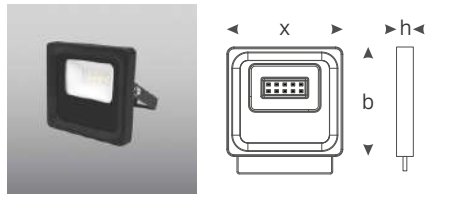

Watt	Lumens
10W	1000lm
20W	2000lm
30W	3000lm
50W	5000lm
100W	10000lm

L(x)	B(b)	Ht(h)
121	113	43
142	129	43
169	158	55
202	212	61
255	265	61





A large, empty white space with a faint grid pattern, intended for taking notes.

General Terms & Conditions:

Prices of all items in this price list are of standard luminaires & are inclusive of GST.

Prices are subject to change without prior Notice.

Product Photographs shown are indicative. Actual product may differ at time of supply.

While the product images, specifications and other details herein are represented to the best of graphic possibility, Focus Lighting and Fixtures Ltd. reserves the right to make technical and formal alterations to the products and specifications in the interest of development / improvement.

All technical parameters like Lm/W, Wattage etc, are subject to tolerance as per BIS standards.

Care has been taken to ensure that the information contained within is correct however company reserves the right to issue amendment's, which may arise due to any errors in price list.

All disputes are subject to Mumbai Jurisdiction only.

The copyrights of all designs, drawings, specifications and information contained in this catalogue are and shall remain the property of Focus Lighting and Fixtures Ltd. and must not be used, copied, published or divulged by any person in whole or in part without exclusive written authorisation from the **Focus Lighting and Fixtures Ltd.**

